

# PRV

PATENT- OCH REGISTRERINGSVERKET

Patentavdelningen

PCT / SE 2004 / 0 0 0 6 2 9

## Intyg Certificate

*Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.*

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*



(71) Sökande AMC Centurion AB, Åkersberga SE  
Applicant (s)

(21) Patentansökningsnummer 0301200-2  
Patent application number

(86) Ingivningsdatum 2003-04-24  
Date of filing

Stockholm, 2004-04-28

För Patent- och registreringsverket  
For the Patent- and Registration Office


*Marita Öun*

Marita Öun

Avgift  
Fee

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

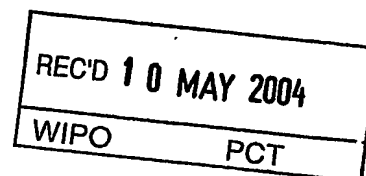

BEST AVAILABLE COPY

PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

ANTENNA DEVICE AND PORTABLE RADIO COMMUNICATION  
DEVICE COMPRISING SUCH AN ANTENNA DEVICE

FIELD OF INVENTION

5 The present invention relates generally to antenna devices and more particularly to a controllable internal multi-band antenna device for use in portable radio communication devices, such as in mobile phones. The invention also relates to a portable radio communication device comprising such an antenna device.

BACKGROUND

Internal antennas have been used for some time in portable radio communication devices. There are a number of advantages connected with using internal antennas, of which can be mentioned that they are small and light, making them suitable for applications wherein size and weight are of importance, such as in mobile phones.

However, the application of internal antennas in a mobile phone puts some constraints on the configuration of the antenna, such as the dimensions of the radiating element or elements, the exact location of feeding and grounding portions etc. These constraints may make it difficult to find a configuration of the antenna that provides a wide operating band. This is particularly important for antennas intended for multi-band operation, wherein the antenna is adapted to operate in two or more spaced apart frequency bands. In a typical dual band phone, the lower frequency band is centered on 900 MHz, the so-called GSM 900 band, whereas the upper frequency band is centered

around 1800 or 1900 MHz, the DCS and PCS band,  
respectively. If the upper frequency band of the  
antenna device is made wide enough, covering both the  
1800 and 1900 MHz bands, a phone operating in three  
5 different standard bands is obtained. In the near  
future, antenna devices operating four or even more  
different frequency bands are envisaged.

The number of frequency bands in passive antennas is  
limited by the size of the antenna. To be able to  
10 further increase the number of frequency bands and/or  
decrease the antenna size, active frequency control  
can be used. An example of active frequency control is  
disclosed in the Patent Abstracts of Japan 10190347,  
which discloses a patch antenna device capable of  
15 coping with plural frequencies. To this end there are  
provided a basic patch part and an additional patch  
part which are interconnected by means of PIN diodes  
arranged to selectively interconnect and disconnect  
the patch parts. Although this provides for a fre-  
20 quency control, the antenna device still has a large  
size and is not well adapted for switching between two  
or more relatively spaced apart frequency bands, such  
as between the GSM and DCS/PCS bands. Instead, this  
example of prior art devices is typical in that  
25 switching in and out of additional patches has been  
used for tuning instead of creating additional fre-  
quency band at a distance from a first frequency band.

A problem in prior art antenna devices is thus to  
provide a multi-band antenna with a small size and  
30 volume and broad frequency bands which retains good  
performance.

SUMMARY OF THE INVENTION

An object of the present invention is to provide an antenna device of the kind initially mentioned wherein the frequency characteristics provides for at least  
 5 two comparatively wide frequency bands while the overall size of the antenna device is small.

Another object is to provide an antenna device having better multi-band performance than prior art devices.

The invention is based on the realization that several  
 10 frequency bands can be provided in a physically very small antenna by arranging the antenna so that in at least two frequency modes the antenna utilizes the first resonance of the antenna structure. This is made possible by providing two radiating elements  
 15 selectively interconnectable by means of a switch and a filter arrangement between the feeding portion and the switching arrangement blocking RF signals.

According to a first aspect of the present invention there is provided an antenna device as defined in  
 20 claim 1.

According to a second aspect of the present invention there is provided portable radio communication device as defined in claim 14.

Further preferred embodiments are defined in the  
 25 dependent claims.

The invention provides an antenna device and a portable radio communication device wherein the problems in prior art devices are avoided or at least miti-

gated. Thus, there is provided a multi-band antenna device having an antenna volume as small as about 2 cm<sup>3</sup> which means a size of the antenna that is reduced as compared to standard multi-band patch antennas but  
5 still with maintained RF performance. Also, the bandwidths of the antenna device according to the invention can be improved as compared to corresponding prior art devices but without any increase in size, which is believed to be a result of the use of the  
10 basic frequency mode of the antenna structure. As an example thereof, bandwidths of as much as 15% of the centre frequency of the higher frequency band have been obtained as compared to 9-10% in conventional prior art antenna devices.

15 The filter is preferably a low-pass filter, providing an efficient RF blocking arrangement.

The switch is preferably a PIN diode, having good properties when operating as an electrically controlled switch.

#### 20 BRIEF DESCRIPTION OF DRAWINGS

The invention is now described, by way of example, with reference to the accompanying drawings, in which:

Fig. 1 shows a schematic diagram of a PIFA antenna device according to the invention;

25 Fig. 2 is a more detailed diagram of the antenna device shown in fig. 1;

Fig. 3 is an overview of a printed circuit board arranged to be fitted in a portable communication

device and having an antenna device according to the invention;

Fig. 4 shows an alternative radiating element configuration;

5 Fig. 4a shows a cross-sectional view along the line IVa-IVa of the radiating element shown in fig. 4:

Fig. 5 shows yet an alternative radiating element configuration;

10 Fig. 6 shows an alternative embodiment wherein one radiating element provides for two resonance frequencies by itself;

Figs. 7 and 7a show an alternative embodiment wherein one radiating element is used as a slave radiator;

15 Figs. 8 shows an alternative embodiment combining a radiating element providing for two resonance frequencies and a radiating element used as a slave radiator; and

Fig. 9 shows a loop antenna device according to the invention.

## 20 DETAILED DESCRIPTION OF THE INVENTION

In the following, a detailed description of preferred embodiments of an antenna device according to the invention will be given. In the description, for purposes of explanation and not limitation, specific  
25 details are set forth, such as particular hardware, applications, techniques etc. in order to provide a thorough understanding of the present invention. How-

ever, it will be apparent to one skilled in the art that the present invention may be utilized in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, apparatuses, and circuits are omitted so as not to obscure the description of the present invention with unnecessary details.

In fig. 1, there is shown an antenna device, generally designated 1. The antenna device comprises a first generally planar rectangular radiating element 10 made of an electrically conductive material, such as a sheet metal or a flex film, as is conventional. A source RF of radio frequency signals, such as electronic circuits of a portable radio communication device, is connected to a feeding portion 12 of the first radiating element.

The antenna device also comprises a second generally planar rectangular radiating element 20. A switch element 30 is provided between the two radiating elements 10, 20. This switch element is preferably a PIN diode, i.e., a silicon junction diode having a lightly doped intrinsic layer serving as a dielectric barrier between p and n layers. Ideally, a PIN diode switch is characterized as an open circuit with infinite isolation in open mode and as an short circuit without resistive losses in closed mode, making it suitable as an electronic switch. In reality the PIN diode switch is not ideal. In open mode the PIN diode switch has capacitive characteristic (0.1-0.4pF) which results in finite isolation (15-25dB @ 1GHz) and in closed mode

the switch has resistive characteristic (0.5-3 ohm) which results in resistive losses (0.05-0.2dB).

A DC control input for controlling the operation of the PIN diode, designated  $V_{\text{Switch}}$  in the figures, is  
5 connected to the first radiating element 10 via a filter block 40 to not affect the RF characteristics of the antenna device. This means that the filter characteristics of the filter block 40 is designed so as to block RF signals. In the preferred embodiment,  
10 the filter block 40 comprises a low pass filter.

In front of the first radiating element 10 there is also provided a DC blocking arrangement 50 connected to ground. The function of this arrangement is to provide for the necessary connection to ground for the  
15 described kind of antenna while simultaneously block DC currents from the DC control input from reaching ground before going through the PIN diode. The DC control thus creates a DC current through the PIN diode to make it conductive.

20 Finally, the second radiating element is connected to ground via a second low pass filter block 60. This second low pass filter is provided so that the grounding of the second radiating element will not adversely affect the RF characteristics of this radiating  
25 element.

A more detailed diagram of the antenna device is shown in fig. 2. It is here shown that each of the low pass filter blocks consists of two inductors and one capacitor arranged between the two inductors and  
30 ground. The DC blocking arrangement 50 comprises a



capacitor arranged between the first radiating element and ground. In the preferred embodiment, both the feeding portion 12 and the DC blocking capacitors are arranged at the same side of the radiating element and preferably at a short side thereof.

The antenna is preferably designed to 50 Ohms.

In fig. 3 there is shown the two radiating elements 10, 20 arranged generally parallel to and spaced apart from a printed circuit board 70 adapted for mounting in a portable communication device 80, such as a mobile phone. The general outlines of the communication device is shown in dashed lines in fig. 3. Typical dimensions for the antenna device 1 is a height of approximately 4 millimetres and a total volume of about 2 cm<sup>3</sup>.

It will be appreciated that all components except for the two radiating elements 10, 20 and the switch element 30 can be provided on the PCB, thus facilitating easy assembly of the antenna device. This is further facilitated by the fact that there is no separate feeding of the switch element.

The antenna device functions as follows. The RF source and other electronic circuits of the communication device 80 operate at a given voltage level, such as 1.5 Volts. The criterion is that the voltage level is high enough to create the necessary voltage drop across the PIN diode, i.e. about 1 Volt. This means that the control voltage  $V_{\text{Switch}}$  is switched between the two voltages "high" and "low", such as 1.5 and 0 Volts, respectively. When  $V_{\text{Switch}}$  is high, there is a

voltage drop across the PIN diode 30 and a corresponding current therethrough of about 5-15 mA. This voltage drop makes the diode conductive, effectively electrically interconnecting the two radiating  
5 elements 10, 20.

With the two radiating elements interconnected, i.e., with the switch element "closed", both radiating elements are active working as one large element with a resonance frequency corresponding to a lower frequency  
10 band.

With the control voltage  $V_{\text{switch}}$  "low", there is an insufficient voltage drop across the PIN diode 30 to make it conductive, i.e., it is "open". The second radiating element is then effectively disconnected  
15 from the first one and only the first radiating element functions as one small element with a higher resonance frequency corresponding to a higher frequency band.

The size and configuration of the two radiating elements are chosen so as to obtain the desired resonance frequencies. Thus, the size and configuration of the first radiating element 10 determines the resonance frequency of the higher frequency band while the combination of the first and second radiating elements  
20 10 and 20 determines the resonance frequency of the lower frequency band. In a preferred embodiment, the two radiating elements are of similar configuration so as to cover the 900 and 1800/1900 MHz bands.

A conventional production method of antenna devices is  
30 to provide an electrically conductive layer forming

the radiating portions of the antenna on a carrier made of a non-conductive material, such as a polymer or other plastic material. The carrier is thus made of a heat-sensitive material and a small heating area is  
 5 desired to keep the temperature as low as possible when soldering components to the antenna device.

In fig. 4 there is shown an alternative configuration of the radiating elements, combining soldering pads for a PIN diode with heat traps for efficient solder-  
 10 ing operation while providing a large overall distance between the two radiating elements. Each of the radiating elements 110, 120 comprises a narrow portion 110a, 120a protruding from the otherwise generally rectangular shape. The protruding portions end in a  
 15 respective pad 110b, 120b to which a switching element in the form of a PIN diode 30 is mounted by means of soldering, for example. By means of this configuration, interference between the two radiating elements are minimised as the general mutual distance  
 20 therebetween is larger than in the embodiment described with reference to figs. 1-3. In order to keep the interference between the radiating elements at acceptable levels, it has been found that they should be separated by at least 3 millimetres, and preferably  
 25 more. Also, by providing the connection portions in the form of pads separated from the main radiating elements by narrow connection portions, heating energy for soldering is kept low, thus minimising damage to the carrier structure.

30 In order to minimise the overall height of the antenna device, thereby saving space in the radio communi-

cation device in which the antenna device is mounted, an essentially C-shaped slit 103 is provided in the carrier 102 around the area in which the PIN diode is mounted. By means of this slit, the area of the carrier in which the PIN diode is provided can be depressed, see the cross-sectional view of fig. 4a. The PIN diode is provided so that it is below the upper surface of the carrier 102, thus maintaining an overall height of the antenna arrangement essentially corresponding to the distance between the radiating elements 110, 120 and the PCB 70.

In an alternative embodiment shown in fig. 5, the mutual distance between the two radiating elements 210, 220 is kept large due to the non-rectangular configuration of the elements. In fig. 5 the sides of the radiating elements facing each other are diverging from the portion where the PIN diode 30 interconnects the two radiating elements.

The first radiating element can itself have a configuration that provide for more than one frequency band. An example thereof is shown in fig. 6, wherein the first radiating element 310 has a general C shape, providing for two resonance frequencies by itself. This provides for an RF characteristics which incorporates a lower frequency band having two resonance frequencies — one provided by the first radiating element itself and one provided by the combination of the first and second radiating elements with the PIN diode conductive, i.e., the switch closed, essentially creating one wider frequency band. There is also an upper frequency band having one resonance frequency

provided by the first radiating element with the PIN diode non-conductive, i.e., the switch open.

The inventive idea of using two radiating element for creating two spaced apart frequency bands of the antenna device can be further improved by the use of the second radiating element as a slave element. This idea is thus applicable when the first radiating element provides both for one resonance frequency, such as in fig. 2, and for two resonance frequencies, such as in fig. 6. This is realised in fig. 7, wherein the second radiating element 420 is grounded at frequencies of one frequency band. This is accomplished by replacing the second low pass filter 60 shown in fig. 1 with a band-stop filter 460 having the S21 characteristics shown in fig. 7a. Thus, at the lower frequency band LB the band-pass filter 460 essentially blocks any signals while it is essentially short-circuited to ground at the higher frequency band HB. By means of the slave radiator, the width of the higher frequency band is further increased.

A combination of the use of a radiating element providing for two resonance frequencies by itself, as shown in fig. 6, and the use of a radiating element as a slave element, as shown in fig. 7, will now be described with reference to fig. 8. The general configuration is similar to the one in fig. 6 with a first radiating element 510 with a general C shape, providing for two resonance frequencies by itself, and a second radiating element 520 connected to ground via a band-pass filter 560, thus operating as a slave element. With this arrangement, four resonance frequen-

cies are obtained, essentially providing for a quad band antenna device.

In the above described embodiments, the radiating elements have been described and shown as essentially planar elements provided essentially parallel to and at a distance from a ground plane, thus constituting part of a PIFA. The inventive idea is also applicable to other antenna structures, such as loop antennas. This will now be described with reference to fig. 9, wherein thin electrically conductive conductors or wires are provided on a generally planar substrate, such as a PCB 670. The conductors or wires comprise a first portion 610 operating as a first radiating element and a second portion 620 operating as a second radiating element. The two portions are interconnected by means of a PIN diode 30 provided so as to create the desired resonance frequencies for the to radiating elements.

A feeding arrangement comprises a source RF of radio frequency signals and a control voltage input  $V_{\text{switch}}$  connected to an end of the first radiating element 610 via a low pass filter 640 blocking RF signals. The second radiating element 620 is connected to ground at an end thereof. The combined lengths of the first and second radiating elements is preferable half the wave length of the centre frequency of a lower frequency band of two frequency bands for which the antenna device is intended to operate.

This arrangement provides for a multi-band antenna device that operates as follows. At frequencies in a

lower frequency band, the control voltage creates a current that makes the PIN diode 30 conductive, effectively interconnecting the two radiating elements, thus providing a loop with a feed end and a ground end. For the lower frequency band the antenna device operates as a loop antenna. At frequencies in a higher frequency band, the PIN diode is non-conductive, effectively separating the two radiating elements. In this way, the first radiating element 610 alone operates as a monopole with a feed end and an open end.

It has been found that a loop antenna operates more efficiently at lower frequencies. By creating a multi-band antenna device that operates as a loop antenna in the lower frequency band and a monopole antenna in the higher frequency band, an efficient use of the antenna device is obtained.

Preferred embodiments of an antenna device according to the invention have been described. However, it will be appreciated that these can be varied within the scope of the appended claims. Thus, a PIN diode has been described as the switch element. It will be appreciated that other kinds of switch elements can be used as well.

A second low pass filter block 60 has been shown in figs. 1 and 2 after the second radiating element 20. It will be appreciated that this filter block can be omitted and the second connected directly to ground without deviating from the inventive idea, although the performance of the antenna device in that case is

somewhat degraded in the case the antenna device is a PIFA.

The radiating elements in figs. 1 and 2 have been described as being essentially planar and generally rectangular. It will be appreciated that the radiating elements can take any suitable shape, such as being bent to conform with the casing of the portable radio communication device in which the antenna device is mounted.

One switch 30 has been shown to interconnect the two radiating elements. It will be appreciated that more than one switch, such as several parallel PIN diodes can be used without deviating from the inventive idea.



CLAIMS

1. An antenna device for a portable radio communication device operable in at least a first and a  
5 second frequency band, the antenna device comprising:
  - a first electrically conductive radiating element (10; 110; 210; 310; 410; 510; 610) having a feeding portion (12) connectable to a feed device (RF) of the radio communication device;
  - 10 - a second electrically conductive radiating element (20; 120; 220; 320; 420; 520; 620) having a grounding portion connectable to ground;
  - a controllable switch (30) arranged between the first and second radiating elements for selectively  
15 interconnecting and disconnecting the radiating elements, the state of the switch being controlled by means of a control voltage input ( $V_{\text{switch}}$ );

characterized by

- a first filter (40; 340; 440; 540; 640) arranged  
20 between the feeding portion (12) and the control voltage input ( $V_{\text{switch}}$ ), wherein the first filter is arranged to block radio frequency signals.

2. The antenna device according to claim 1, wherein the first filter (40; 340; 440; 540; 640) is a  
25 low pass filter.

3. The antenna device according to claim 1 or 2, wherein the switch (30) comprises a PIN diode.

4. The antenna device according to any of claims 1-3, comprising a second filter (60; 360; 460; 560) connected to the grounding portion of the second radiating element (20) and being connectable to ground.

5. The antenna device according to claim 4, wherein the second filter (60; 360; 460) is a low pass filter.

6. The antenna device according to claim 4, wherein the second filter (560) is a band-stop filter (460) having a stop-band at the lower of the first and second frequency bands.

7. The antenna device according to any of claims 1-6, wherein the first radiating element (310; 510) has a configuration that provides for more than one resonance frequency.

8. The antenna device according to any of claims 1-7, comprising a DC blocking arrangement (50) arranged between the first radiating element (10; 310; 410; 510) and ground.

9. The antenna device according to claim 8, wherein the feeding portion (12) of the first radiating element (10) and the DC blocking arrangement (50) are arranged on the same side of the first radiating element (10) and preferably on a short side of the first radiating element (10).

10. The antenna device according to any of claims 1-9, wherein at least one of the first and second radiating elements (110, 120) comprises a protruding

portion (110a, 110b, 120a, 120b), and wherein the switch (30) is connected to the protruding portion.

11. The antenna device according to any of claims 1-10, comprising a generally planar printed circuit board (70), wherein the first and second radiating elements (10, 20) and the switch (30) are arranged generally parallel to and spaced apart from the printed circuit board.

12. The antenna device according to any of claims 1-11, wherein the antenna device has a volume less than  $3 \text{ cm}^3$  and preferably less than  $2 \text{ cm}^3$ .

13. The antenna device according to any of claims 1-6, wherein the first and second radiating elements (610, 620) comprises a thin electrically conductive conductor or wire and wherein first and second radiating elements together form a loop.

14. A portable radio communication device, comprising a generally planar printed circuit board and an antenna device connected to a feed device (RF) with electronic circuits provided for transmitting and/or receiving RF signals, and a ground device, wherein the antenna device comprises:

- a first electrically conductive radiating element (10; 110; 210; 310; 410; 510; 610) having a feeding portion (12) connected to the feed device (RF);
- a second electrically conductive radiating element (20; 120; 220; 320; 420; 520; 620) having a grounding portion connected to the ground device;

- a controllable switch (30) arranged between the first and second radiating elements for selectively interconnecting and disconnecting the radiating elements, the state of the switch being controlled by means of a control voltage input ( $V_{\text{Switch}}$ );

**characterized by**

- a first filter (40; 340; 440; 540; 640) arranged between the feeding portion (12) and the control voltage input ( $V_{\text{Switch}}$ ), wherein the first filter is arranged to block radio frequency signals.

ABSTRACT

A multi-band antenna device for a portable radio communication device has first and second radiating elements (10, 20). A controllable switch (30) is  
5 arranged between the radiating elements for selectively interconnecting and disconnecting thereof. The state of the switch is controlled by means of a control voltage input ( $V_{\text{switch}}$ ). A filter (40) that blocks  
10 radio frequency signals is arranged between the feeding portion and the control voltage input. By means of this arrangement, two broad and spaced apart frequency bands are obtained with retained performance and small overall size of the antenna device. A communication  
15 device comprising such an antenna device is also provided.

(FIG. 1)

AD 134474

1/4

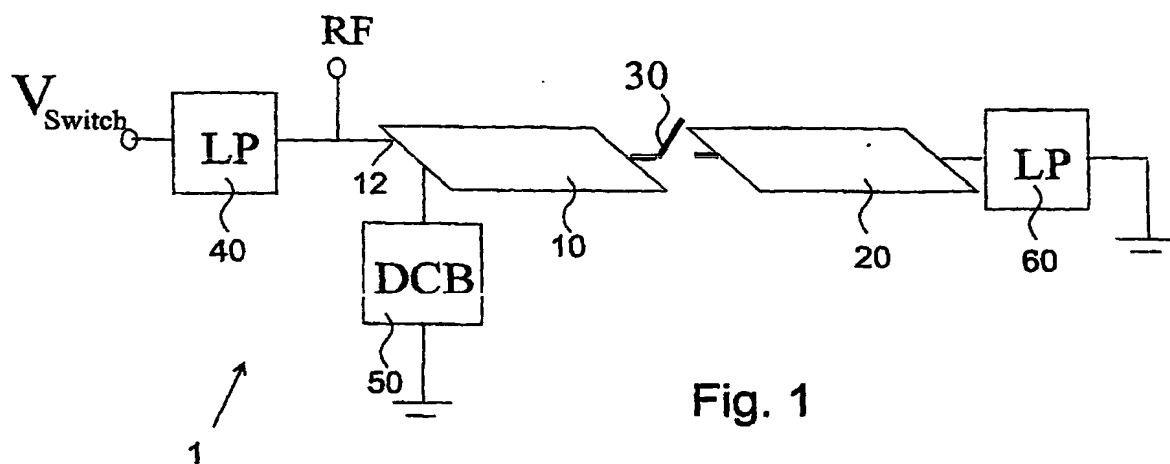


Fig. 1

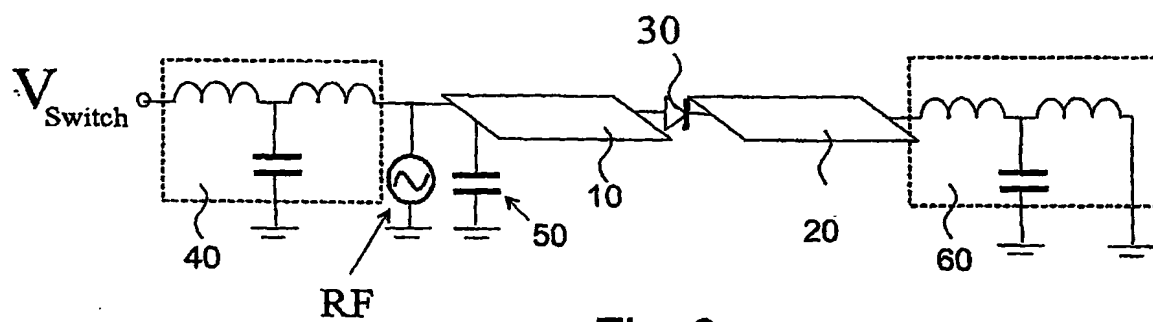


Fig. 2




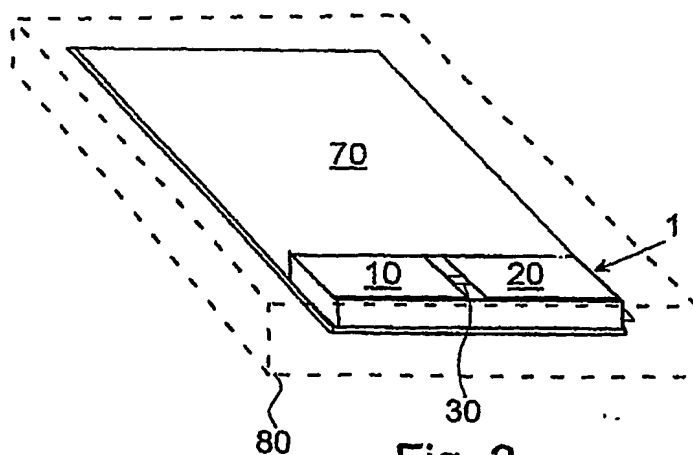


Fig. 3

2/4

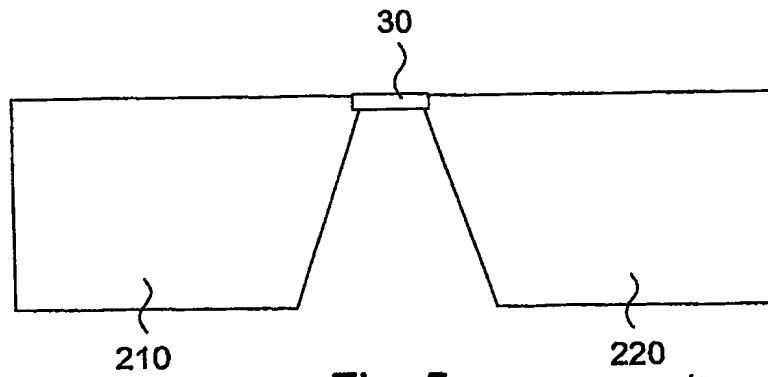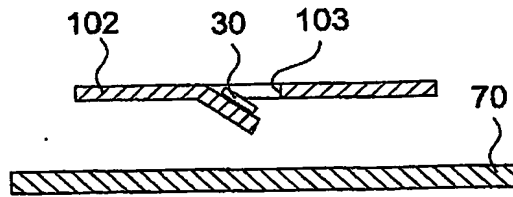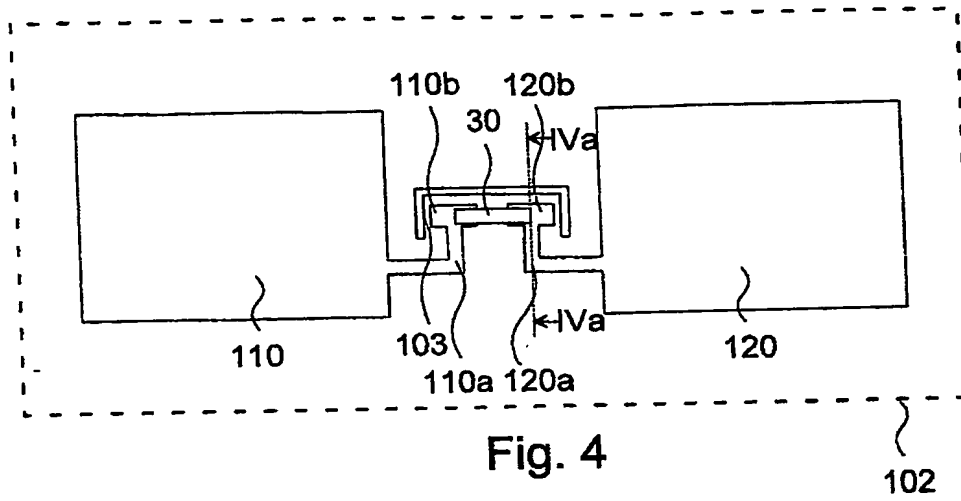

3/4

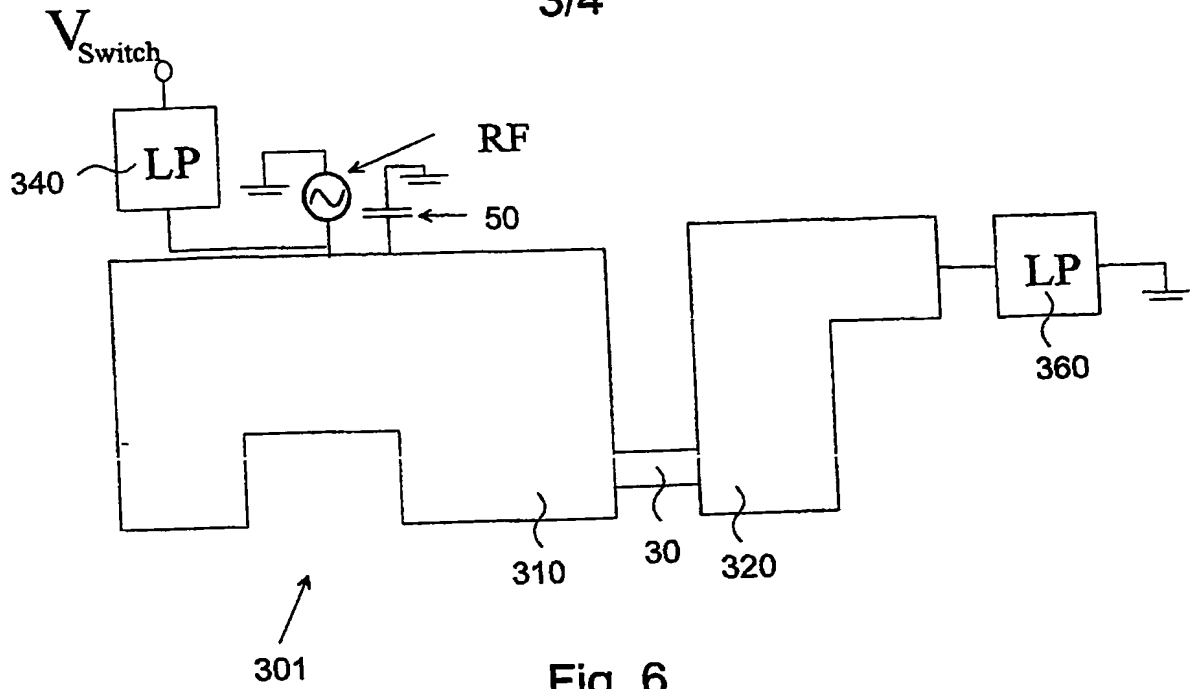


Fig. 6

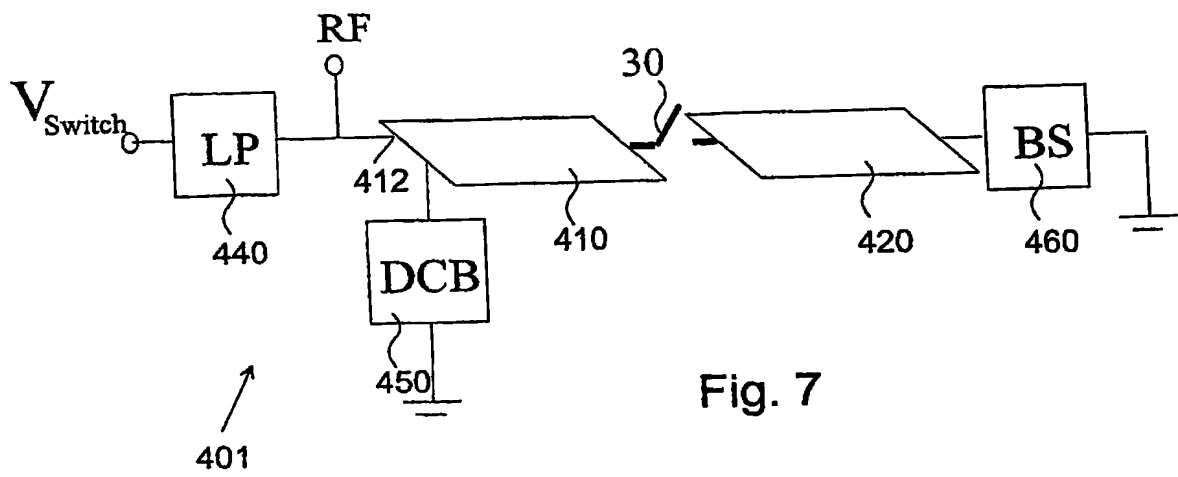


Fig. 7

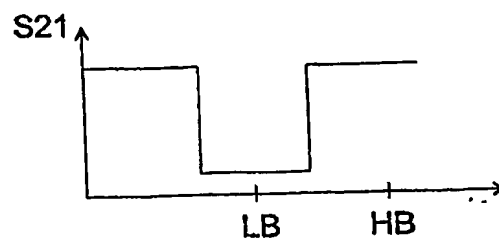
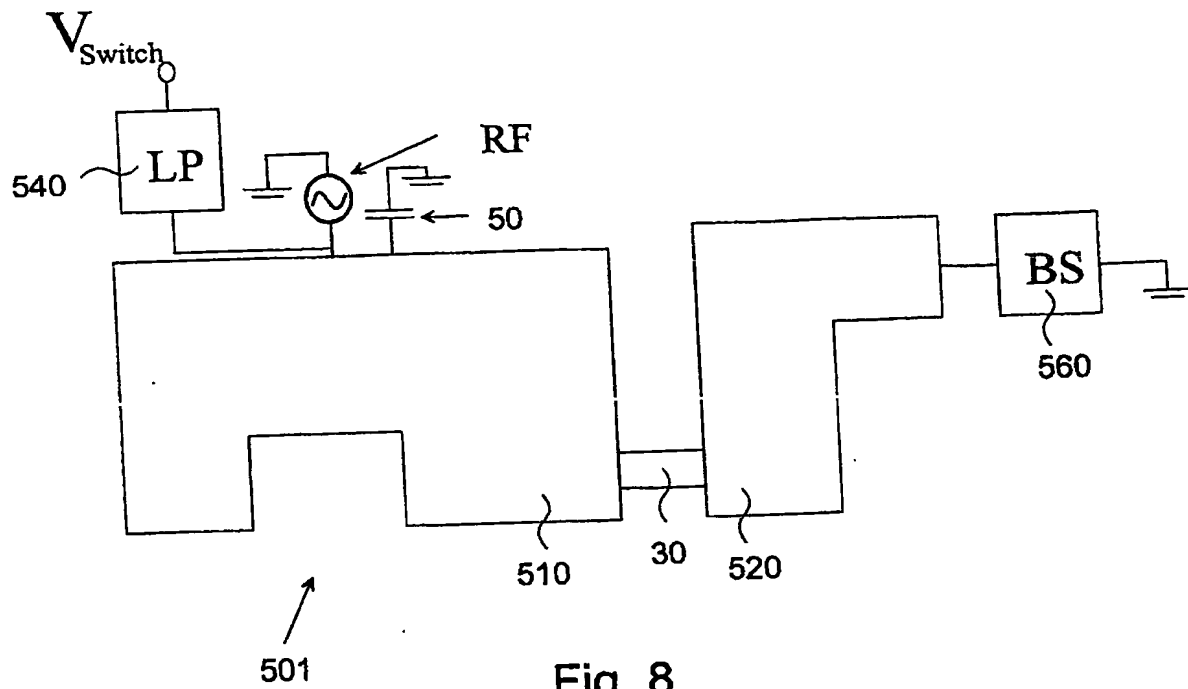
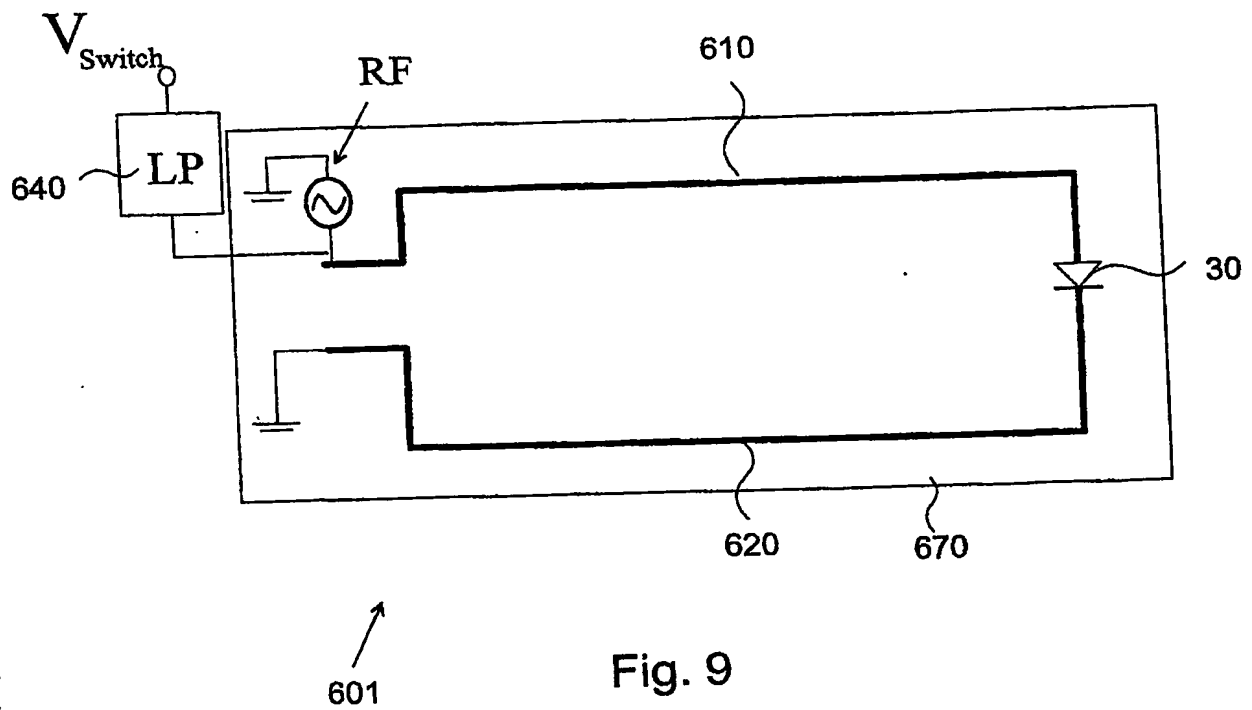


Fig. 7a





**Fig. 8**



**Fig. 9**

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**